




After

After

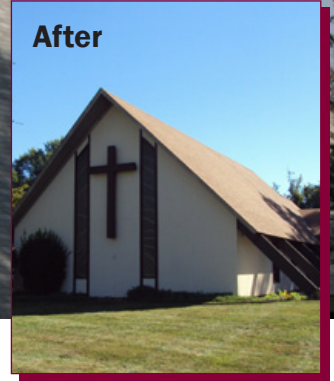

Before

Roofing

Shiner Roofing, Siding and Windows recently completed a project in McLean, Virginia that we would like to show you. On this property we performed a complete roof replacement for the entire church structure.

We started the project by removing the existing layers of old asphalt shingles and underlayment down to the substrate. The old roofing material was removed in sections to maintain a complete overnight water-tight seal. The existing deck was then checked and repaired as needed. We then installed two rows of CertainTeed WinterGuard ice guard membrane along all eaves, in all valleys, and at the base of all penetrations and roof wall intersections. CertainTeed WinterGuard is a composite material of asphalt polymers formed into a rolled sheet. The asphalt makes it vapor-tight, and the polymers make the asphalt elastic and sticky, so it creates a water-tight defense system. We then installed custom fabricated painted aluminum drip edge along all eave and rake edges, followed by new underlayment over the roof deck. The new asphalt shingles were then installed per the manufacturer's specifications. The installation was completed with new 770 Pro-Flash painted aluminum exhaust vent covers, custom aluminum painted flashing, and hidden ridge vents.

The result – a church facility that has been rejuvenated by a new asphalt shingle roof. What a difference a new roof can make.

Call us today for a free, no-obligation consultation and estimate for your next commercial improvement project!

ShinerRoofing.com/Showcase/McLean



After



Professional. Start to Finish.